


SMR* ON-OFF PART TURN ELECTRIC ACTUATORS - 90 sec

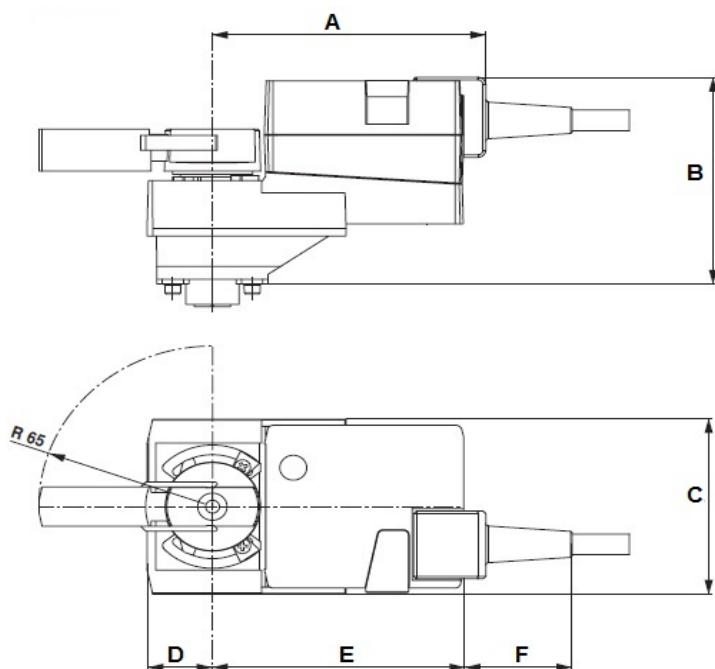

Actuators:

Nominal voltage:

Tolerance:

Power consumption:

Electrical connection:

Torque Nm:

Rotation angle:

Timing:

Protection degree:

IEC/EN certification:

UL certification:

Ambient temperature:

Humidity:

Maintenance:

OPTION:

SMRLR24	SMRLR230	SMRNR24	SMRNR230	SMRSR24 *	SMRSR230
ac/dc 24V	ac 230V	ac/dc 24V	ac 230V	ac/dc 24V	ac 230V
19.2...28.8V	85...265V	19.2...28.8V	85...265V	19.2...28.8V	85...265V
1,5 W	2W	2W	3W	2.5W	3 W
3 x 0.75 mm2 cable, 1 m					
5	5	10	10	20	20
90°					
90 seconds					
IP54					
IEC/EN 60730-1 and IEC/EN 60730-2-14					
UL60730-1A, UL 6730-2-12 and CAN/CSA E 60730-1:02					
-30-50°C					
95%RH non-condensing					
maintenance-free					
NC/NO Emergency function plus 2x SPDT aux contacts - 75 sec					

Dimensions mm	A	B	C	D	E	F	Weight kg
SMRLR*	102	85	71	25	93	42	0.55
SMRNR*	107	83	85	28	97	43	0.75
SMRSR*	118	86	93	33	108	43	1






SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>

SMRLFR* ON-OFF PART TURN ELECTRIC ACTUATORS - 9 sec

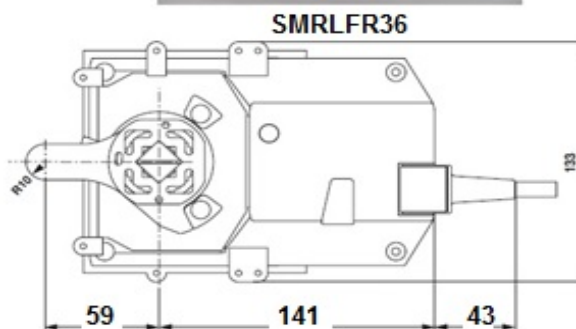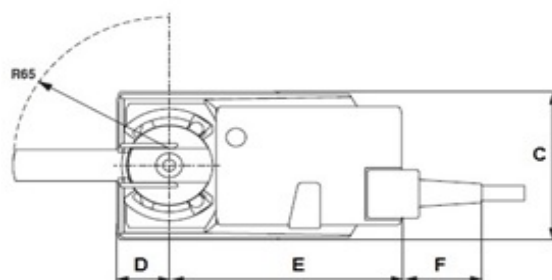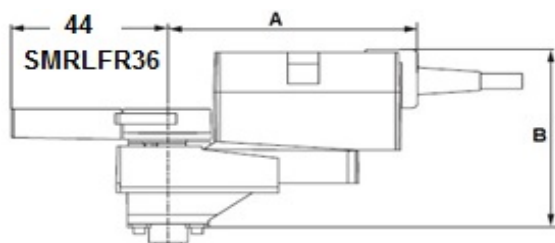

Models	SMRLFR24	SMRLFR28	SMRLFR36
Nominal voltage:	ac/dc 24V	ac 24V	ac/dc 24V
Tolerance:	19.2...28.8V	19.2...28.8V	19.2...28.8V
Power consumption:	13 W	13W	15W
Electrical connection:	3 x 0.75 mm ² cable, 1 m		
Torque Nm:	4	8	16
Rotation angle:	90°		
Timing:	9 seconds		
Protection degree:	IP54		
IEC/EN certification:	IEC/EN 60730-1; IEC/EN 60730-2-14		
UL certification:	UL60730-1A, UL 6730-2-12 and CAN/CSA E 60730-1:02		
Ambient temperature:	-30-50°C		
Humidity:	95%RH non-condensing		
Maintenance:	maintenance-free		

Dimensions mm

Models	A	B	C	D	E	F	Weight kg
SMRLFR24	129	95	85	28	120	42	0.92
SMRLFR28	140	98	93	33	130	43	1.1
SMRLFR36	151	110	133	59	141	43	2.8



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>