

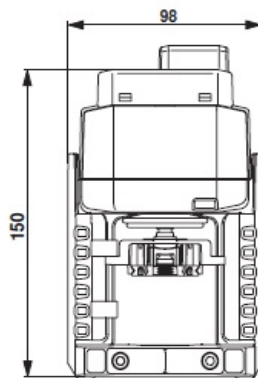
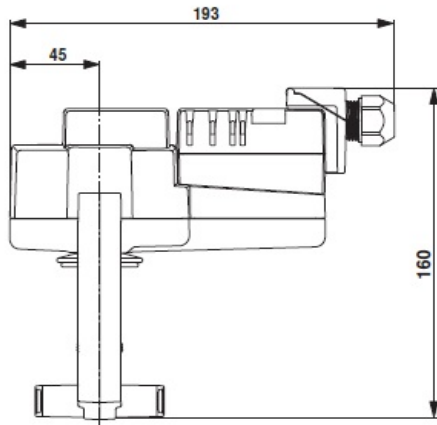


SML * MODULATING ELECTRIC LINEAR ACTUATORS

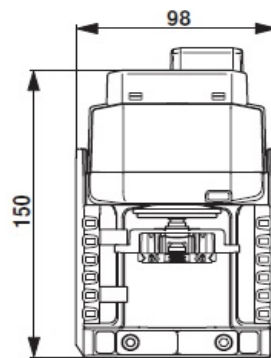

SMLLV24A
SMLNV24A

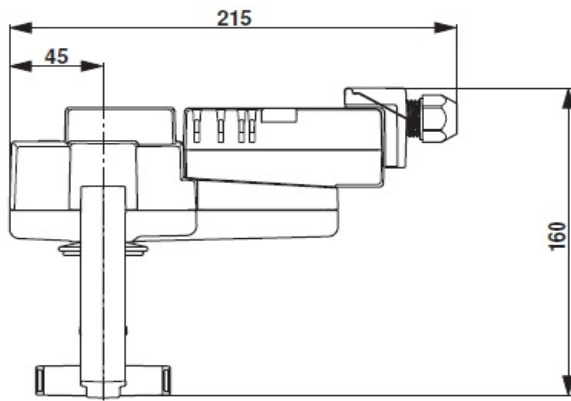

SMLSVC24A


Model	SMLLV24A	SMLNV24A	SMLSVC24A
Actuating force motor	500 N	1000 N	1500 N
Nominal stroke	15 mm	20 mm	20 mm
Power supply, consumption	24V ac/dc, 1W	24V ac/dc, 1.5 W	24V ac/dc, 2 W
Connection supply/control	Terminals with cable 1 m, 4 x 0.75 mm ² (Terminal 4 mm ²)		
Sound power level motor	45 dB (A)		35 dB (A)
Operating range	DC (0) 2...10V		
Position feedback	DC (0) 2...10V		
Actuating time	150 s / 15 mm	150 s / 20 mm	150 s / 20 mm
Protection degree	IP 54		
Note	Gear disengagement with push-button, can be locked. Position indication		
Weight	about 1,4 kg	about 1,4 kg	about 1,5 kg
EMC	CE according to 2004/108/EC		
Certification IEC/EN	60730-1 and 60730-2-14		
Operative conditions	0...50°C, 95% RH, non-condensing		





SATEMA

13856 VIGLIANO B.SE - Via Milano, 395
Tel. +39 015811102 - 015510156 - Fax 0158853029
Mail: info@satema.it <http://www.satema.it>


SML * MODULATING ELECTRIC LINEAR ACTUATORS

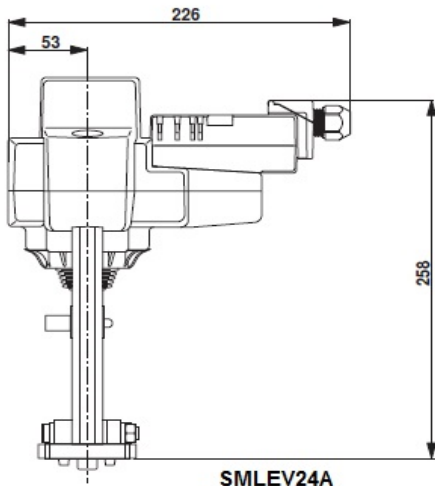

SMLEV24A

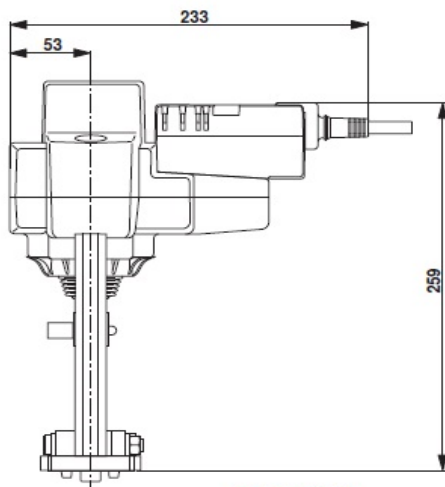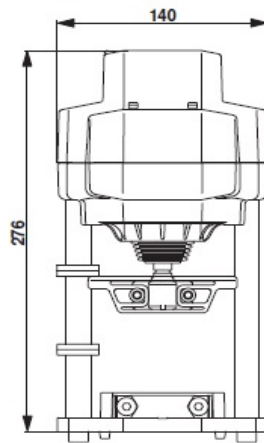

SMLRV24A

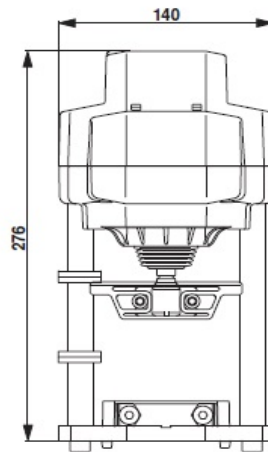

Model

Actuating force motor

Nominal stroke

Power supply, consumption

Connection supply/control

Sound power level motor

Operating range

Position feedback

Actuating time

Protection degree

Note

Weight

EMC

Certification IEC/EN

Operative conditions

SMLEV24A	SMLRV24A
2500 N	4500 N
40 mm	40 mm
24V ac/dc, 4 W	24V ac/dc, 6 W
Terminals with cable 1 m, 4 x 0.75 mm ²	
55 dB (A)	56 dB (A)
DC (0) 2...10V	
DC (0) 2...10V	
150 s / 40 mm	120 s / 40 mm
IP 54	
Gear disengagement with push-button, can be locked. Position indication	
about 4.3 kg	about 4.4 kg
CE according to 2004/108/EC	
60730-1 and 60730-2-14	
0...50°C, 95% RH, non-condensing	



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>