




## RPBM MECHANICAL SWITCH BOX

### MECHANICAL SWITCH BOX

Compact limit switch box polyamide PA6 black, according to VDI/VDE 3845, with transparent polycarbonate cover with standard 3D indicator. Enclosure housing IP67 according to DIN EN 60529. Cable gland black M20x1,5 (for cable Ø 6-12mm). Mounting bracket adjustable in height and length, stainless steel AISI 304. Sealings EPDM and NBR, Screws AISI 304. Shaft stainless steel AISI 303.



| Switch  | Voltage | Max currente              | Contacts | Temperature | ATEX |
|---------|---------|---------------------------|----------|-------------|------|
| Crouzet | 250V    | 15A (250Vac) 2.5A (24Vdc) | Silber   | -20...80°C  | NO   |
| Bartec  | 250V    | 5A (250Vac) 7A (30Vdc)    | Silber   | -20...80°C  | YES  |

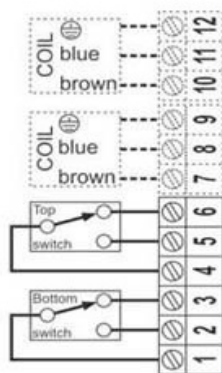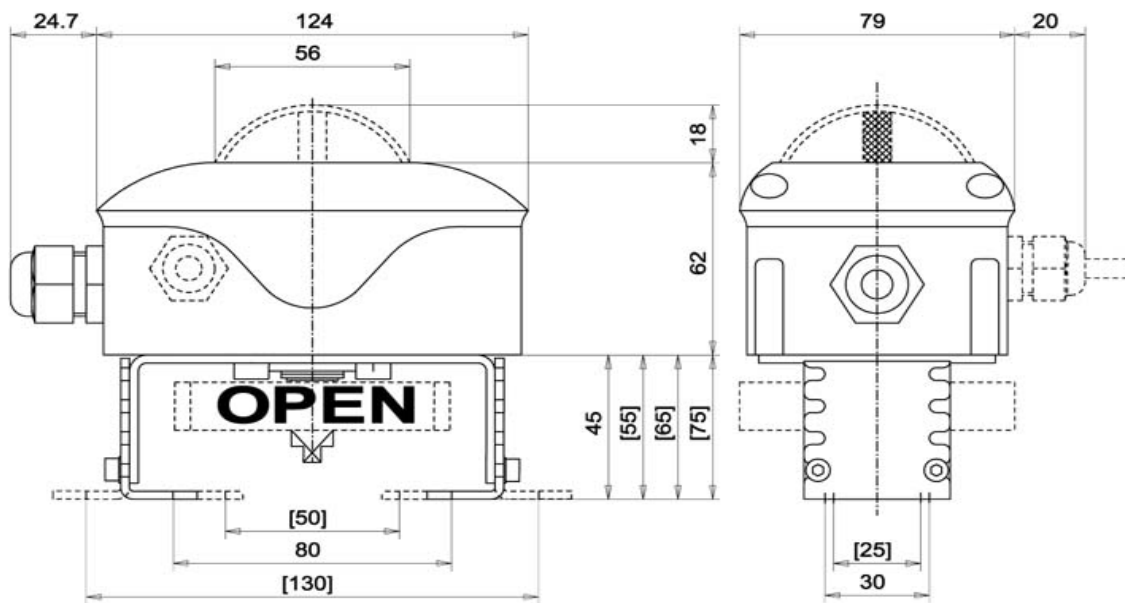

ATEX

II 2G EEx d IIC T6  
II 3D T80°C X



**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: [info@satema.it](mailto:info@satema.it) <http://www.satema.it>