

SMVREX - VSEX - SERVOCOMANDO ELETTRICO PART TURN ATEX

Versione ATEX dei modelli SMVR-VS.



Modello	SMVREX			SMVSEX		
Coppia massima	SMVREX25	SMVREX45	SMVREX75	SMVSEX100	SMVSEX150	SMVSEX300
Coppia nominale	25Nm	45Nm	75Nm	100Nm	150Nm	300Nm
	20Nm	35Nm	60Nm	75Nm	125Nm	250Nm
Alimentazione	15V ... 30V 50/60Hz (12V ... 48V DC)					
	100V ... 240V 50/60Hz (100V ... 350V DC)					
	400V Trifase					
Tempo di manovra per 90° (±1s)	7s (15s*)	15s	20s	15s	30s	60s
	400V: 10s	400V: 10s	400V: 15s	400V: 10s	400V: 20s	400V: 35s
Potenza	45W	45W	45W	45W	45W	45W
	400V: 52W	400V: 52W	400V: 52W	400V: 135W	400V: 135W	400V: 135W
Boccola guida a stella	17mm			22mm		
Connessione ISO	F05/F07			F07/F10		
Finecorsa posizione	4 (2 regolabili)					
Angolo di rotazione	Standard 90° (0°-180° o 0°-270° su richiesta)					
Ciclo di lavoro	50%					
Protezione / ATEX	IP68 / ATEX : II 2 G D - Ex t IIB T6 Gb - Ex t IIIC T80°C Db IP68 (FAILSAFE and 400V = T5 and 95°C)					
Temperatura ambiente operativa	-20 ... +70°C (FAILSAFE: -10...40°C)					
Peso	Da 4.0 a 4.4 Kg			Da 6.0 a 6.4 Kg		




SATEMA

13856 VIGLIANO B.SE - Via Milano, 395


Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>

SMVREX - VSEX - SERVOCOMANDO ELETTRICO PART TURN ATEX

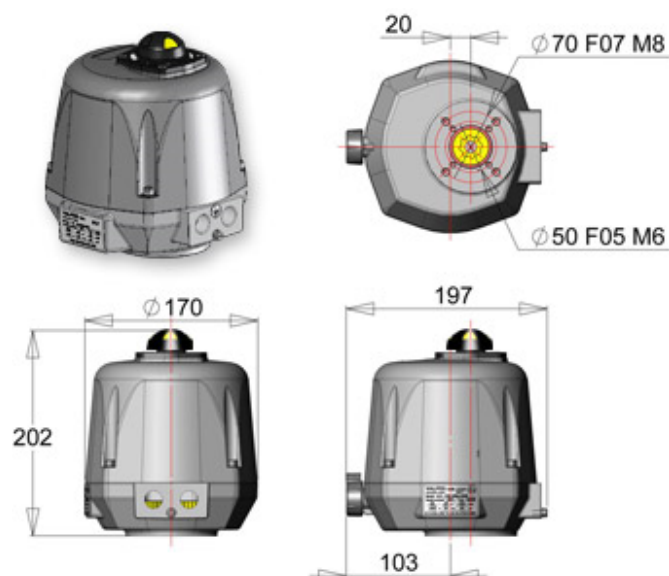

Mod. SMVREX

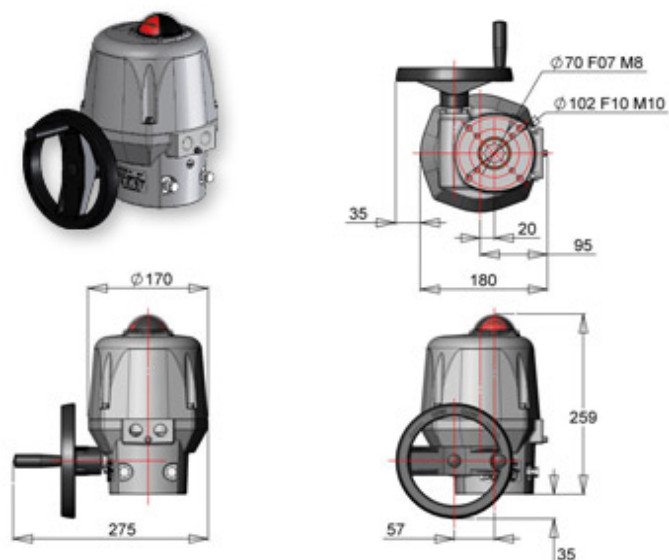

Mod. SMVSEX



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>