

## FM \* - MANUALLY AND MECHANICALLY VALVES

### IN LINE VALVES M5 - G1/8" Functions 2/2 - 3/2 - 5/2


Mechanical and manual valve series. Suitable for multi-directional flows and dual supply pressure applications, they provide high flow rates. Lightweight and corrosion-resistant materials.

Medium: Compressed air, filtered, lubricated and non-lubricated  
 Operating Pressure: Maximum 26.5" Hg to 145 psig (-0.9 to 10 bar)  
 Ambient temperature: 0...+70°C


Operator / Return	Function	Port size	Flow	Code	Drawing
Roller lever /spring	2/2	M5		<b>18VFIN060117</b>	-
Roller lever /spring	2/2	1/8"		<b>18VFINVE13UW8-5</b>	-
Roller lever /spring	3/2	1/8"	335	<b>18VFIN03041002</b>	A
Roller lever /spring	5/2	1/8"	335	<b>18VFINX3044202</b>	E
Push-Pull	3/2	1/8"	335	<b>18VFIN03042502</b>	



G1/8" - 3/2, ritorno a molla, corpo base  
 G1/8" - 3/2, spring return, basic body

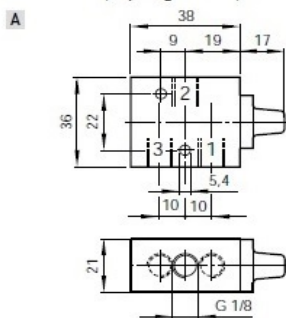

G1/8" - 5/2, ritorno a molla, corpo base  
 G1/8" - 5/2, spring return, basic body

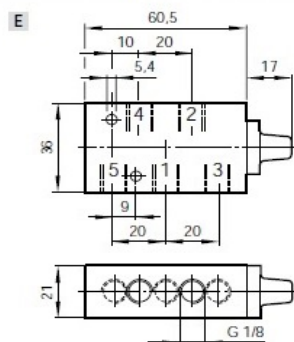

**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: [info@satema.it](mailto:info@satema.it)

<http://www.satema.it>

## 18VFIN \* - MINIATURE PNEUMATIC LIMIT SWITCHES

Miniature limit switch internal diameter 1.5 mm

Connections for 4 mm tube

Flow rate 60 NI/min

Zinc alloy body

Polyurethane shutter

Pressure 3-8 bar

18VFIN **PXC-M111**





Accessories:

18VFIN **PXC-Z11** Plastic roller lever

18VFIN **PXC-Z12** Plastic roller lever,  
unidirectional operation



**PXC-M111**

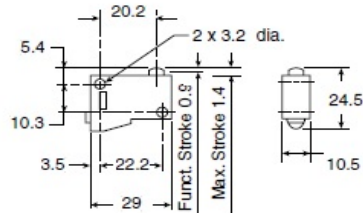

**PXC-Z11 / Z12**



**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: [info@satema.it](mailto:info@satema.it)

<http://www.satema.it>