

## 18ACCA-RILT\* - PA12 POLYAMIDE TUBE

PA12 polyamide tube, stabilized to light and heat, resistant to chemical agents, hydrocarbons and oils in general and with remarkable mechanical performance. They are not suitable for food and medical use. DIN 73738 standard.



Diameter			@ 23 °C		
external	internal	thickness	Working pressure P1 bar	Burst pressure P2 bar	Bending radius mm
6	4	1	27	80	30
8	6	1	19	58	40
10	8	1	15	53	60
12	10	1	13	44	85

Tolerances on the external Ø (as per DIN standard)

From 3 to 10mm +/- 0,10mm

From 11 to 22mm +/- 0,15mm

Temperature -40-+80°C

Pressure variations as a function of temperature

T (°C)	20	30	50	60	80
Pressure %	100	83	62	56	50

Code	Description
18ACCA-RILT-06X04-NT	TUBETTO RILSAN PA12 NEUTRO 6X4
18ACCA-RILT-08X06-NT	TUBETTO RILSAN PA12 NEUTRO 8X6
18ACCA-RILT-10X08-NT	TUBETTO RILSAN PA12 NEUTRO 10X8
18ACCA-RILT-12X10-NT	TUBETTO RILSAN PA12 NEUTRO 12X10




### PLASTIC HOSE CUTTER

Code		
18ACCA-RILT-PINZETTA		



### BASES FOR POLYAMIDE TUBE

External tube	No. of places	Code
4	10	18ACCA-RILT-BASE04

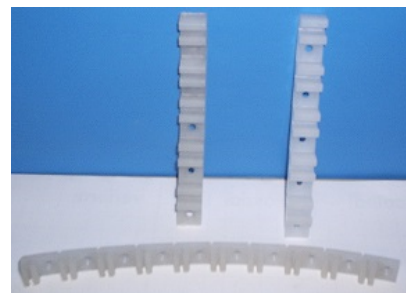

**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: [info@satema.it](mailto:info@satema.it)

<http://www.satema.it>

18\_047