

SPT975* STAINLESS STEEL FLEXIBLE HOSE

S.S. 321 flexible hoses, parallel helical turns, with S.S.304 outer braid. Indispensable for mounting the rotary joints. Ensure freedom of movement at the joint and then a perfect seal. Are installed wherever they meet, together with unfavorable environmental conditions, problems of chemical aggressiveness, high temperature, pressure, vacuum, frequent movements, static and dynamic misalignments, vibrations.



Other designs available:

SPT970* = without external braid

SPT976* = with two S.S.304 external braids (1.4301 EN-10088-1).

Material: Sss 321 standard

Fittings: carbon steel, silver alloy braze welding


Threads: standard threaded fixed male + female swivel Gas UNI 339/338
on request UNI, ASA flanges

Diameters: from 1/2" to 2" (up to DN 300 on request)

Lengths: 500 mm standard, lengths on request

Temperature: -50...+400°C standard

Diameter	minimum curvature radius	minimum bending radius	Nominal Pressure bar
1/2"	285	45	70
3/4"	345	55	50
1"	375	70	40
1"1/4	405	80	35
1"1/2	480	100	30
2"	570	130	25

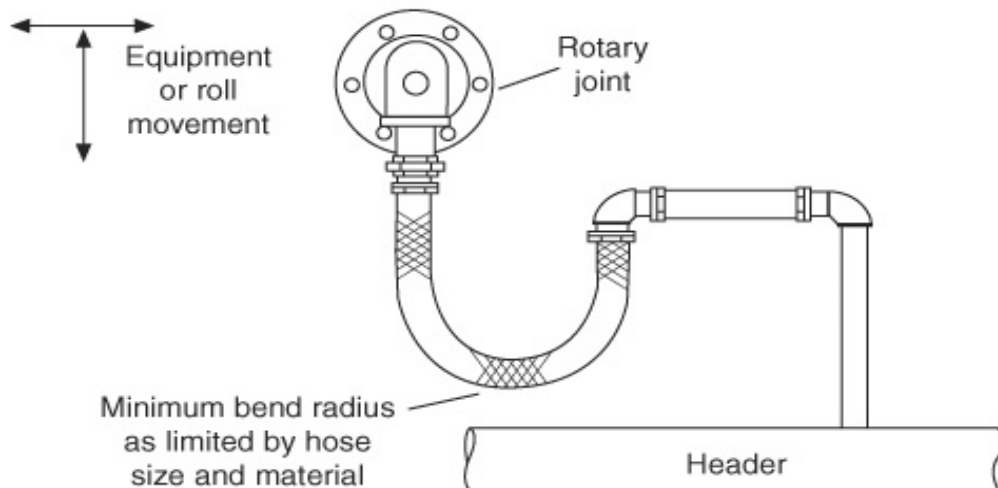

SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>