

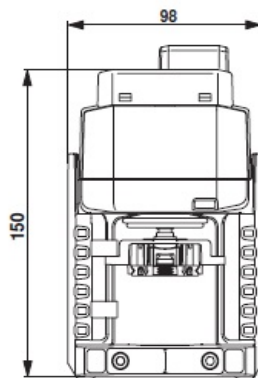
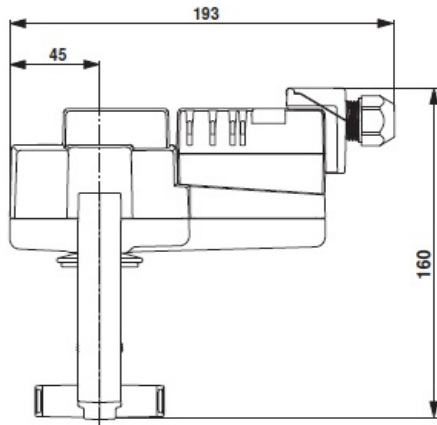


## SML \* MODULATING ELECTRIC LINEAR ACTUATORS

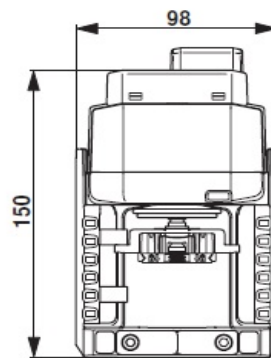

**SMLVC24A**  
**SMLNV24A**

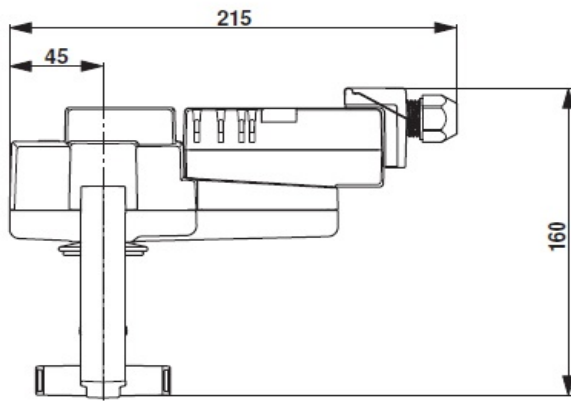

**SMLSVC24A**

| Model                     | <b>SMLLV24A</b>                                                                  | <b>SMLNV24A</b>  | <b>SMLSVC24A</b> |
|---------------------------|----------------------------------------------------------------------------------|------------------|------------------|
| Actuating force motor     | 500 N                                                                            | 1000 N           | 1500 N           |
| Nominal stroke            | 15 mm                                                                            | 20 mm            | 20 mm            |
| Power supply, consumption | 24V ac/dc, 1W                                                                    | 24V ac/dc, 1.5 W | 24V ac/dc, 2 W   |
| Connection supply/control | Terminals with cable 1 m, 4 x 0.75 mm <sup>2</sup> (Terminal 4 mm <sup>2</sup> ) |                  |                  |
| Sound power level motor   | 45 dB (A)                                                                        |                  | 35 dB (A)        |
| Operating range           | DC (0) 2...10V                                                                   |                  |                  |
| Position feedback         | DC (0) 2...10V                                                                   |                  |                  |
| Actuating time            | 150 s / 15 mm                                                                    | 150 s / 20 mm    | 150 s / 20 mm    |
| Protection degree         | IP 54                                                                            |                  |                  |
| Note                      | Gear disengagement with push-button, can be locked. Position indication          |                  |                  |
| Weight                    | about 1,4 kg                                                                     | about 1,4 kg     | about 1,5 kg     |
| EMC                       | CE according to 2004/108/EC                                                      |                  |                  |
| Certification IEC/EN      | 60730-1 and 60730-2-14                                                           |                  |                  |
| Operative conditions      | 0...50°C, 95% RH, non-condensing                                                 |                  |                  |




**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395



Tel. +39 015811102 - Fax 0158853029

Mail: [info@satema.it](mailto:info@satema.it) <http://www.satema.it>


## SML \* MODULATING ELECTRIC LINEAR ACTUATORS

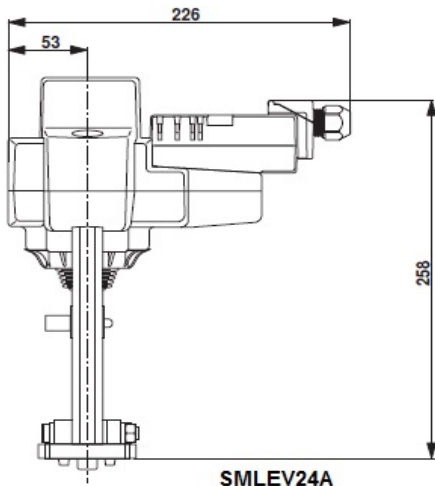

**SMLEV24A**

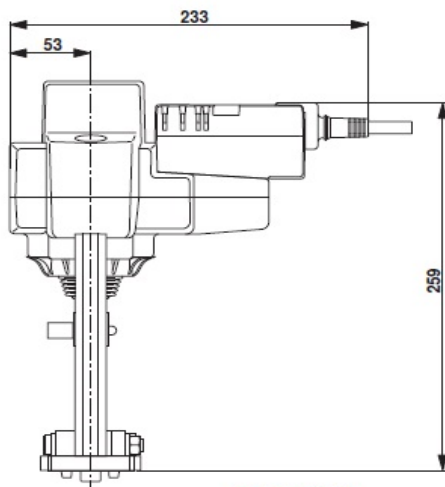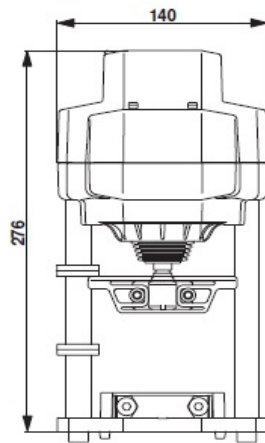

**SMLRV24A**

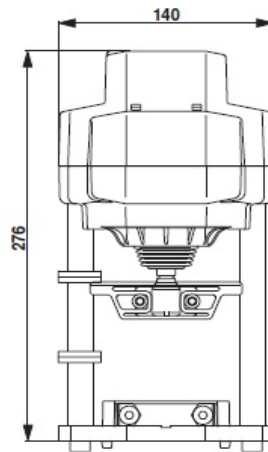

Model

Actuating force motor

Nominal stroke

Power supply, consumption

Connection supply/control

Sound power level motor

Operating range

Position feedback

Actuating time

Protection degree

Note

Weight

EMC

Certification IEC/EN

Operative conditions

| SMLEV24A                                                                   | SMLRV24A       |
|----------------------------------------------------------------------------|----------------|
| 2500 N                                                                     | 4500 N         |
| 40 mm                                                                      | 40 mm          |
| 24V ac/dc, 4 W                                                             | 24V ac/dc, 6 W |
| Terminals with cable 1 m, 4 x 0.75 mm <sup>2</sup>                         |                |
| 55 dB (A)                                                                  | 56 dB (A)      |
| DC (0) 2...10V                                                             |                |
| DC (0) 2...10V                                                             |                |
| 150 s / 40 mm                                                              | 120 s / 40 mm  |
| IP 54                                                                      |                |
| Gear disengagement with push-button, can be locked.<br>Position indication |                |
| about 4.3 kg                                                               | about 4.4 kg   |
| CE according to 2004/108/EC                                                |                |
| 60730-1 and 60730-2-14                                                     |                |
| 0...50°C, 95% RH, non-condensing                                           |                |



**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - Fax 0158853029

Mail: [info@satema.it](mailto:info@satema.it) <http://www.satema.it>