

VSIT3FF* - 3WAYS STAINLESS STEEL BALL VALVES ISO5211 FLANGED

3-way ball valve, four seals, "T" drilling ball

Control element: ISO 5211 - DIN 3337 flange for actuator

Connection: turning threaded flanges EN 1092-1: 2003

Other versions: DIN 11851, clamp, garolla, SMS, Weld, Victaulic

Full bore

Material: SS 304 or SS 316

Sizes: from DN 10 to DN 100

Seal gaskets: virgin P.T.F.E.

Working temperature: -20°C +160°C

Outer finish: Polished


On request:

- ANSI 150 - 300 flanges
- Gaskets: PTFE with carbon graphite up to 180 ° C




DN	10	15	20	25	32	40	50	65
L	120	130	140	150	180	200	220	240
H	46,5	49	56,5	61	81,5	89	91,5	101,5
D	90	95	105	115	140	150	165	185
B	12	12	14	14	16	16	18	18
R	30	34	42	51	63	75	89	110
A	60	65	75	85	100	110	125	145
No. x F	4X14	4X14	4X14	4X14	4X18	4X18	4X18	4X18
PN	40	40	40	40	40	40	25	16
ISO-DIN	F.03/F.04	F.03/F.04	F.04/F.05	F.04/F.05	F.05/F.07	F.05/F.07	F.07/F.10	F.07/F.10
Nm	10	12	23	25	33	40	50	60

DN	80	100	125
L	260	300	325
H	115	131	190
D	200	220	250
B	18	20	22
R	120	140	153
A	160	180	210
No. x F	8X18	8X18	8X18
PN	16	16	16
ISO-DIN	F.07/F.10	F.07/F.10	F.07/F.10
Nm	110	130	130

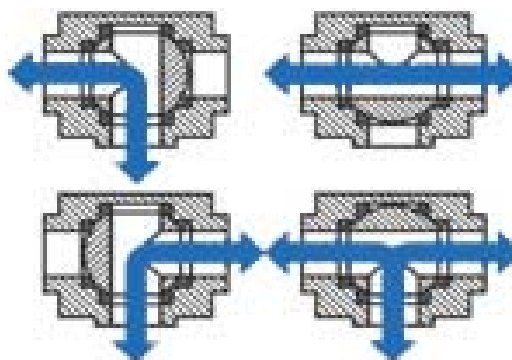

T drilling ball

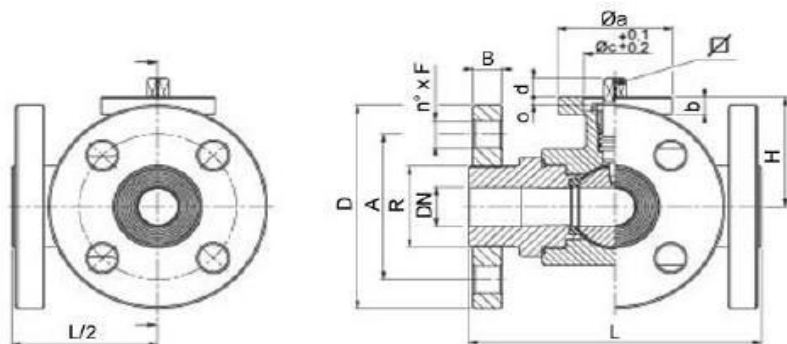

SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>

VSIT3TF* - 3WAYS STAINLESS STEEL BALL VALVES ISO5211 THREADED

3-way ball valve, four seals, "T" drilling ball

Control element: ISO 5211 - DIN 3337 flange for actuator

Connections: ISO 228 Female/Female/Female

Full bore

Material: SS 304L or SS 316L

Sizes: from 1/4" to 4"

Seal gaskets: virgin P.T.F.E.

Working temperature: -20°C +160°C

Outer finish: Polished




On request:

- ISO 7, NPT thread
- Gaskets: PTFE with carbon graphite up to 180 ° C



G	1/4"	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"
DN	12	12	15	20	25	32	40	50
L	72	72	82	92	102	118	134	144
I	16	16	18	19	20	20	20	20
H	46,5	46,5	49	56,5	61	81,5	89	91,5
R	45	45	52	60	70	85	100	110
S	40	40	42	52	60	75	90	100
PN	40	40	40	40	40	40	40	25
ISO-DIN	F.03/F.04	F.03/F.04	F.03/F.04	F.04/F.05	F.04/F.05	F.05/F.07	F.05/F.07	F.07/F.10
Nm	10	10	12	23	25	33	40	50

G	2"1/2"	3"	4"
DN	65	80	100
L	160	200	240
I	22	26	26
H	101,5	116	131
R	123	160	190
S	95	115	145
PN	25	16	16
ISO-DIN	F.07/F.10	F.07/F.10	F.07/F.10
Nm	60	110	130

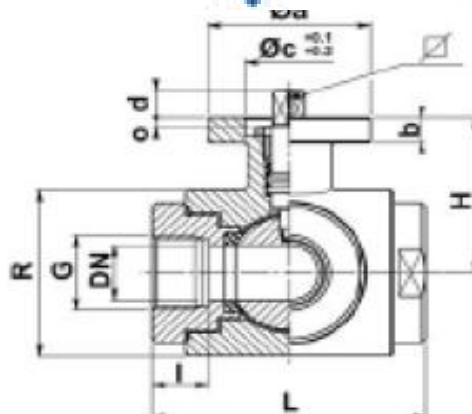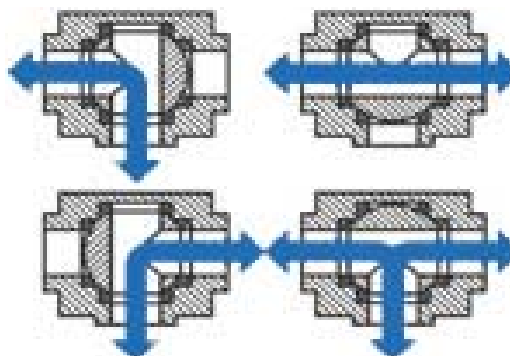

"T" drilling ball



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - 015510156 - Fax 0158853029

Mail: info@satema.it <http://www.satema.it>