

RM/8000 ROUND PROFILE ISO CYLINDERS ISO6432

Double acting, ISO 6432 – Ø 12 ... 25 mm

Standard magnetic piston RM/8***/M/

High resistance stapled heads

Corrosion resistant

Fixing nut on the nosepiece and nut on the stem



Fluido: Aria compressa, filtrata, lubrificata, non lubrificata

Funzionamento: Doppio effetto, pistone magnetico con ammortizzamento regolabile o paracolpi

Pressione d'esercizio: 1...10 bar

Temperatura d'esercizio: -10°C ... +80°C max

12	16	20	25
RM/8012/025	RM/8016/M/025	RM/8020/025	RM/8025/M/25
RM/8016/M/025	RM/8016/040	RM/8020/M/025	
RM/8012/050	RM/8016/M/050	RM/8020/080	
RM/8012/100	RM/8016/100	RM/8020/M/200	
RM/8012/125			
RM/8012/M/200			

Available while supplies last

Sensor mounting:

Stroke	25
25	QM/33/025/22
40	
50	
80	
100	
125	
160	
200	
250	



PRESSURE THRESHOLD SENSORS

They detect the stopping of a cylinder through the pressure drop in the exhaust chamber, direct mounting on cylinders.

PWS-M101 Electrical output 3A, CO contact 12 – 230 V ~ / 10 VA*, 2 m cable, 3 wires 0.5 mm²




SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: info@satema.it <http://www.satema.it>

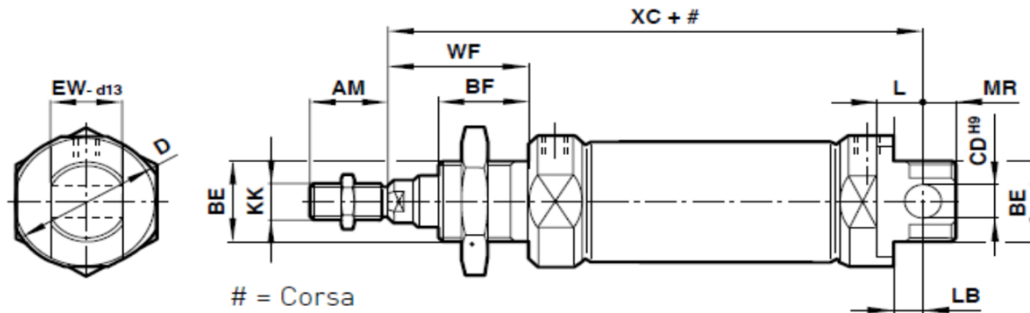

Cylinder Diameters:	12	16	20	25
AM	16	16	20	22
BE	M16X1,5	M16X1,5	M22X1,5	M22X1,5
BF	17	17	20	22
CDH9	6	6	8	8
D	21	21	30	30
EW d13	11,9	11,9	15,9	15,9
KK	M6	M6	M8	M10X1,25
L	9	9	12	12
LB	3	4	3	7
MR	8	7	11	9
WF	22	22	24	28
XC	75	82	95	104
Connection	M5	M5	1/8"	1/8"




SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: info@satema.it <http://www.satema.it>

RM/8000 ROUND PROFILE ISO CYLINDERS ISO6432

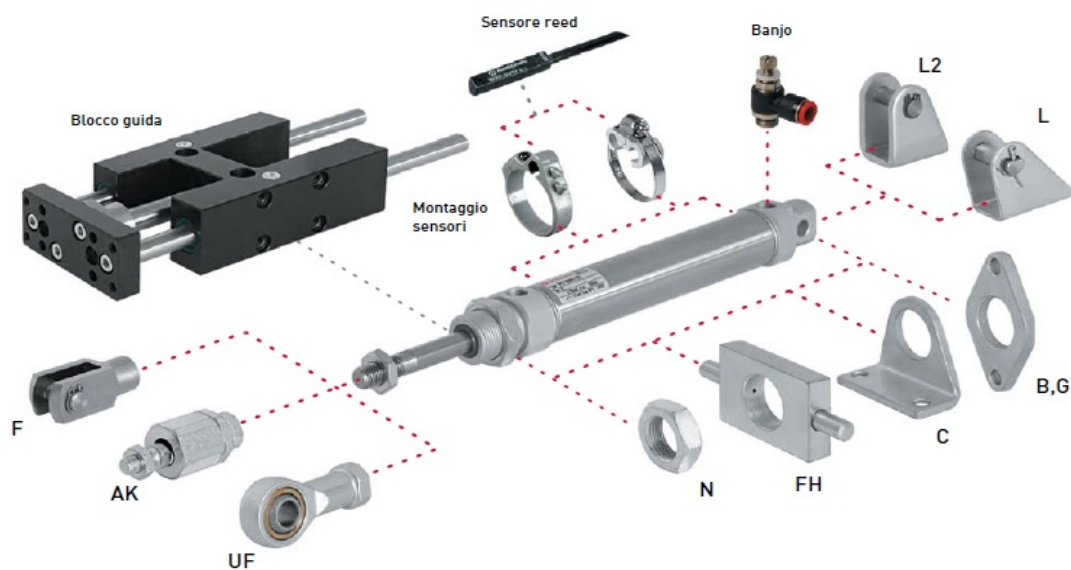

Cylinder Diameters:	F
12	Front Fork
16	QM/8012/25



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: info@satema.it <http://www.satema.it>


RM/91000 SINGLE ACTING SHORT STROKE CYLINDERS

Single-acting, non-cushioned, magnetic cylinders and retracted rod Ø 50 mm allow a reduction in overall dimensions of approximately one third compared to ISO/VDMA models. Low-friction, long-lasting seals. Completely corrosion resistant. Standard magnetic piston.

Fluid: Compressed air, filtered, lubricated or non-lubricated

Pressure: 2 ... 10 bar

Temperature: -5°C ... +80°C max.

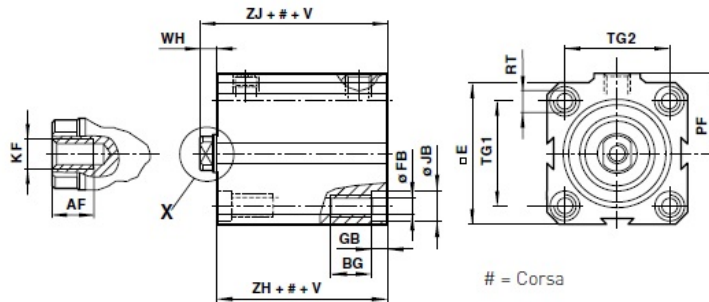

Cylinder Diameters:	50
AF	14
BG	16
E	63
FB	6,8
GB	6,5
JB	10,5
KF	M10
PF	37
RT	M8
TG 1	48
TG 2	48
V #0-25	30
V #26-50	60
WH	8
ZH	35
ZJ	43
Connection	1/8"
Piston	20
Corsa 25	RM/91050/M/25



SATEMA

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: info@satema.it <http://www.satema.it>