

18ACCA-RIR TOGNELLA TAPS AND QUICK COUPLINGS

Quality taps and quick couplings, which allow you to make quick connections from compressed air systems without having to interrupt the upstream flow. To unhook, simply pull the ring nut of the tap towards the connection.

Tap material:

- central body OT58 UNI5705
- knurled ring in treated and burnished steel
- O-ring nitrile compound
- grade A stainless steel balls
- AISI304 stainless steel springs

Graft material:

- steel heat treated and ground and then burnished.


Bursting pressures and flow rates:

Size -05 418 Kg/cm², 1500 lt/1'

Size -08 636 Kg/cm², 4666 lt/1'

Operating pressures: up to 150 bar

Operating temperature: -10÷100 °C

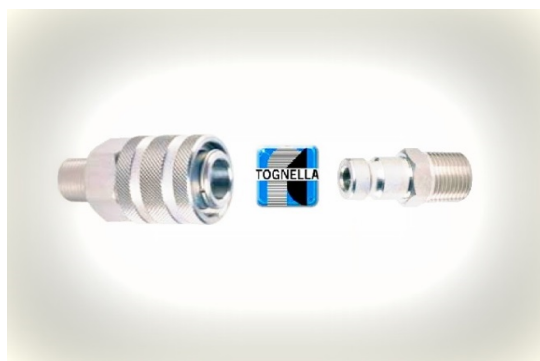

Code	Description	
18ACCA-RIR152108_1/2	TAP FT 1521-08 1/2 male connection	
18ACCA-RIR1524050614	TAP FT 1524-05 Rubber HOSE CONNECTION 6X14	
18ACCA-RIR1524050817	TAP FT 1524-05 Rubber HOSE CONNECTION 8X17	
18ACCA-RIR1524080817	TAP FT 1524-08 Rubber HOSE CONNECTION 8X17	
18ACCA-RIR1526081008	TAP FT 1526-08 HOSE CONNECTION 10X8	
18ACCA-RIR55105_1/8	QUICK COUPLING FT 551/5 MALE CONNECTION 1/8	
18ACCA-RIR55108_1/4	QUICK COUPLING FT 551/8 MALE CONNECTION 1/4	
18ACCA-RIR55208_3/8	QUICK COUPLING FT 552/8 FEMALE CONNECTION 3/8	
18ACCA-RIR55405_0614	QUICK COUPLING FT 554/5 Rubber HOSE CONNECTION 6X14	
18ACCA-RIR55405_0817	QUICK COUPLING 554/5 Rubber HOSE CONNECTION 8X17	
18ACCA-RIR55408_0817	QUICK COUPLING FT 554/8 Rubber HOSE CONNECTION 8X17	
18ACCA-RIR55605_0604	QUICK COUPLING FT 556/5 HOSE CONNECTION 6X4	
18ACCA-RIR55605_0806	QUICK COUPLING FT 556/5 HOSE CONNECTION 8X6	
18ACCA-RIR55608_1008	QUICK COUPLING FT 556/8 HOSE CONNECTION 10X8	



SATEMA 13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102

Mail: info@satema.it <http://www.satema.it>

18_046