

## TP32 SHORT PRESSURE TRANSMITTER

Short pressure transmitter, for use in machine tools, hydraulics, small plants. SS304 sensor ceramic body, Viton or PTFE.  
 Process connection 1/4 "BSP M  
 Accuracy class 0.5%  
 Range 0 ... 0.1 to 0 ... 600 bar  
 Output 4/20 mA std, on request 0/5V and 0/10V  
 Body diameter 27 mm.




### DESCRIPTION

Gauge Pressure Range bar (Overpressure = 1.5 x full scale)								
0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4
6	10	16	25	40	60	100	160	250
400	600							

### TECHNICAL SPECIFICATIONS

Process connection: G1/4"B  
 Materials: SS 304 housing, Viton or PTFE seal  
 Supply: 12...30 Vdc  
 Accuratezza: 0.5 % f.s.  
 Media Temperature: -25...+85°C  
 Environment Temperature: -30...+85°C  
 Compensated Temperature.: 0...50°C; -20...80°C  
 Temperature influence: 0.02%F.S./°C  
 Protection: IP65  
 Elettrical connection: DIN  
 Operating life: >1 x 10<sup>8</sup> pressure cycles

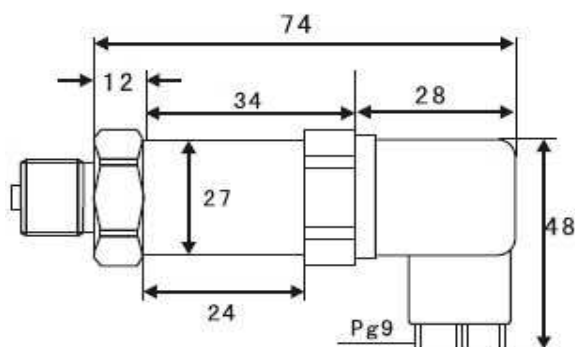

**SATEMA**

13856 VIGLIANO B.SE - Via Milano, 395

Tel. +39 015811102 - Fax 0158853029

Mail: [info@satema.it](mailto:info@satema.it) <http://www.satema.it>